

## Acoplamiento Rápido para Aire Comprido

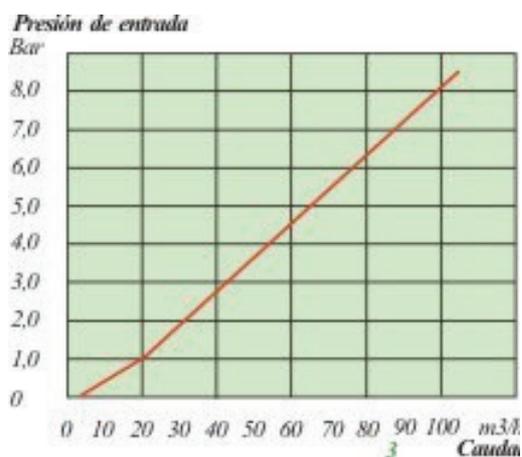
### Serie 8500



- Cuerpo de bronce niquelado
- Cuerpo móvil de bronce niquelado
- Resortes y bolillas de acero inox.
- Juntas de nitrilo
- Presión de servicio 20 bars
- Acoplamiento automático
- Pasaje 5,50 mm.
- Conectores de bronce niquelado

### Conectores Serie 8500

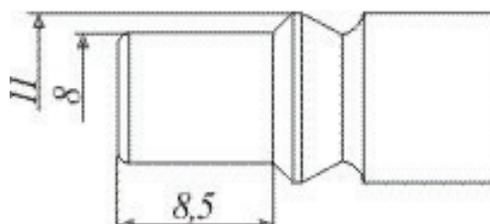
#### Curva de Presión / Caudal



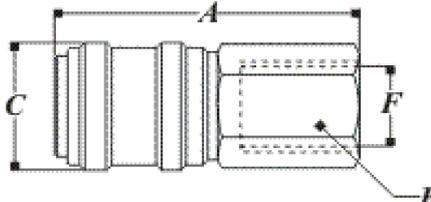
**Caudal de aire a 6 bar:**  
75 m<sup>3</sup>/h (1.245 l/mn)

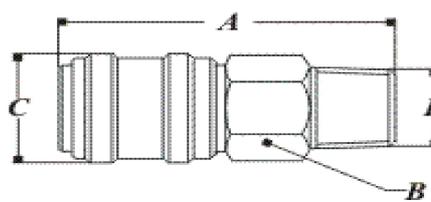
#### Intercambiabilidad

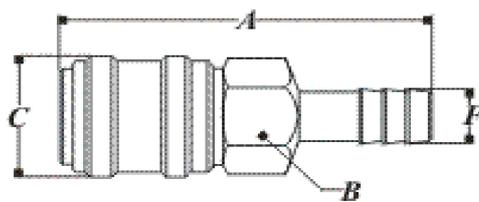
Compatibles con: ARO 210 STD

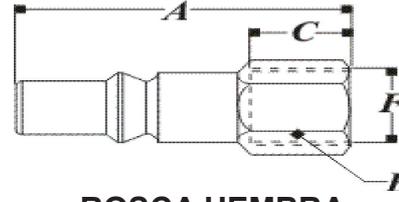


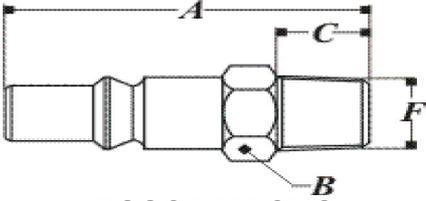
### Conexiones

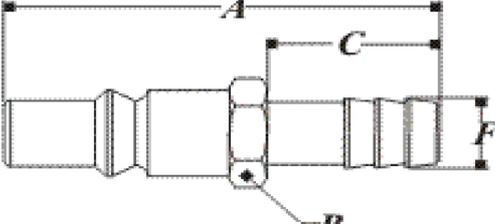
	<b>F</b>	<b>Código</b>	<b>A</b>	<b>B</b>	<b>C</b>
 <p><b>ROSCA HEMBRA</b></p>	1/8 BSP	8501	57	13/16"	25
	1/4 BSP	8502	57	13/16"	25
	3/8 BSP	8503	59	13/16"	25

	<b>F</b>	<b>Código</b>	<b>A</b>	<b>B</b>	<b>C</b>
 <p><b>ROSCA MACHO</b></p>	1/8 BSP	8508	57	13/16"	25
	1/4 BSP	8509	56	13/16"	25
	3/8 BSP	8510	58	13/16"	25

	<b>F</b>	<b>Código</b>	<b>A</b>	<b>B</b>	<b>C</b>
 <p><b>RACORD PARA MANGUERA</b></p>	1 / 4 *	8504	67	13/16"	25
	5 / 16 *	8505	67	13/16"	25
	3 / 8 *	8506	67	13/16"	25
	1 / 2 *	8507	67	13/16"	25

	<b>F</b>	<b>Código</b>	<b>A</b>	<b>B</b>	<b>C</b>
 <p><b>ROSCA HEMBRA</b></p>	1/8 BSP	8511	38	9/16"	10
	1/4 BSP	8512	39	5/8"	12
	3/8 BSP	8513	41	13/16"	14

	<b>F</b>	<b>Código</b>	<b>A</b>	<b>B</b>	<b>C</b>
 <p><b>ROSCA MACHO</b></p>	1/8 BSPT	8518	39	1/2"	9
	1/4 BSPT	8519	42	9/16"	12
	3/8 BSPT	8520	44	13/16"	14

	<b>F</b>	<b>Código</b>	<b>A</b>	<b>B</b>	<b>C</b>
 <p><b>RACORD PARA MANGUERA</b></p>	1 / 4 *	8514	51	1/2"	22
	5 / 16 *	8515	51	1/2"	22
	3 / 8 *	8516	51	1/2"	22
	1 / 2 *	8517	51	9/16"	22

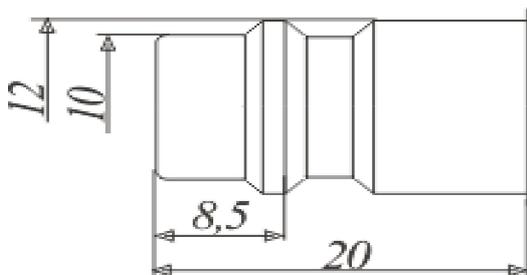
### Serie 8700



- Cuerpo de bronce niquelado
- Cuerpo móvil de bronce niquelado
- Resortes y bolillas de acero inox.
- Juntas de nitrilo
- Presión de servicio 20 bars
- Acoplamiento automático
- Pasaje 7,50 mm.
- Conectores de bronce niquelado

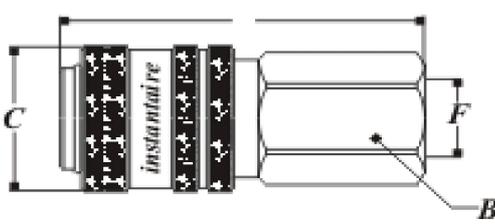
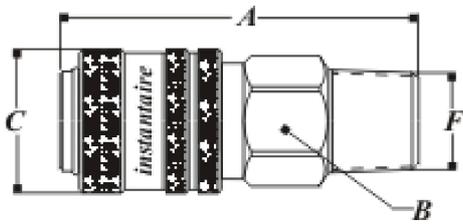
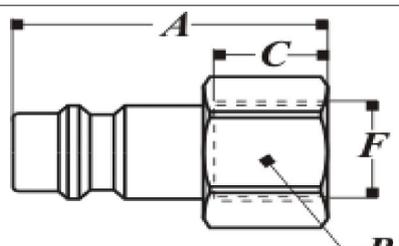
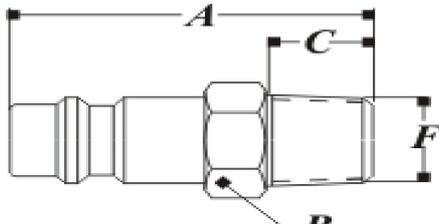
### Conectores Serie 8700

#### Intercambiabilidad



- Rectus 25
- Rectus 26
- Cejn 320
- Prevost ESC07
- Legris Serie 25
- Oetiker Serie C/C1
- Otras marcas europeas.

### Conexiones

	F	Código	A	B	C
 <p>Diagram showing a female thread connection. Dimensions: C is the length of the Instantaire sleeve, F is the length of the female thread, and B is the diameter of the female thread.</p> <p><b>ROSCA HEMBRA</b></p>	1 / 2 BSP	8704	57	3/4"	23
 <p>Diagram showing a male thread connection. Dimensions: A is the length of the Instantaire sleeve, C is the length of the male thread, and F is the length of the female thread. B is the diameter of the female thread.</p> <p><b>ROSCA MACHO</b></p>	1 / 2 BSP	8711	54	7/8"	23
 <p>Diagram showing a standard female thread connection. Dimensions: A is the length of the sleeve, C is the length of the thread, and F is the length of the thread. B is the diameter of the thread.</p> <p><b>ROSCA HEMBRA</b></p>	1 / 2 BSP	8714	39	3/4"	16
 <p>Diagram showing a standard male thread connection. Dimensions: A is the length of the sleeve, C is the length of the thread, and F is the length of the thread. B is the diameter of the thread.</p> <p><b>ROSCA MACHO</b></p>	1 / 2 BSP	8721	44	7/8"	16